


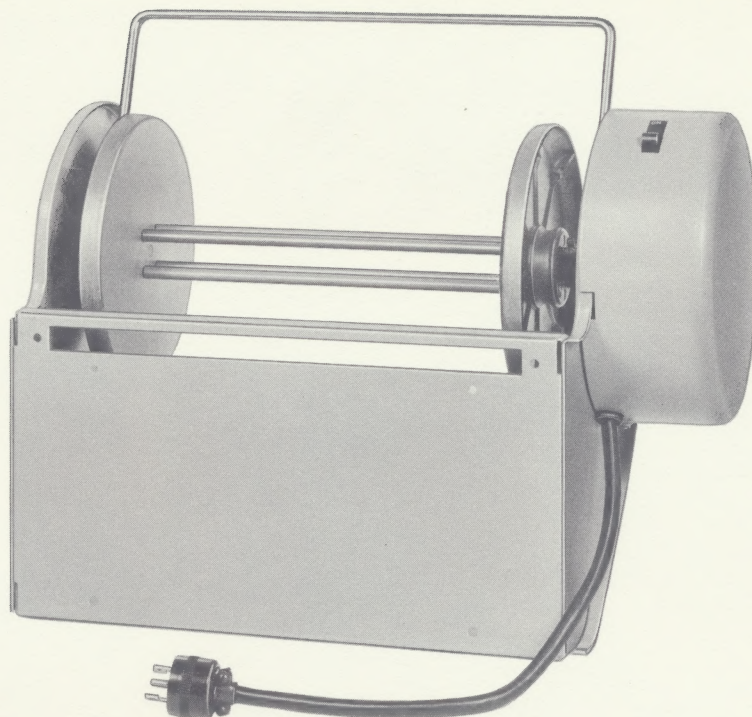

TELETYPE PAPER WINDER (LPW 300)

The Teletype LPW 300 Paper Winder can be used in conjunction with Teletype Model 28, 32, 33 and 35 console page printers.

This unit can accommodate paper from 4¼ in. to 8½ in. wide, and has a capacity of 400 feet of paper (.0035- to .0043-in. thick) when used with Model 28 or Model 35 page printers. Capacity is 320 feet in Model 32 or Model 33 applications.

The LPW Paper Winder should be used only on printers equipped with friction-feed platens.


When used with Model 28 or Model 35 sets, the LPW 300 should be mounted with a copy display rack (part no. 193950). For Model 32 or

Model 33 applications a modification kit (part no. 195259) is required.

Power requirement for the LPW 300 is 115 Volts, AC $\pm 10\%$, 50/60 cycle current. The winder's spindle has a direct drive from the motor—belts, gears, pulleys, etc., are eliminated.

The LPW 300 Paper Winder is available in various colors to harmonize with office surroundings and to match associated equipment.

Teletype Corporation manufactures this equipment for the Bell System and others who require the utmost dependability from their message and data communications systems.



TELETYPE®
CORPORATION SUBSIDIARY OF Western Electric Company

GENERAL OFFICES

5555 Touhy Avenue, Skokie, Ill.
Phone: Area Code 312
676-1000

TWX: 910-223-3611 (24-hour automatic
answering service)

W.U. service on premises
TELEX: 02:5451

GOVERNMENT LIAISON OFFICE

425—13th Street, N.W.
Washington 4, D.C.
Phone: METropolitan 8-1016

Litho in U.S.A.

© 1963 by Teletype Corp.
LPW2.5M2.51063—Issue 1